

STUDIES AND REPORTS

SCIENTIFIC PROOF

Photocatalytic UV-LED Air Purifier


Removes viruses, bacteria and
harmful gases from the air.



Viability of SARS-CoV-1 and HCoV-19 (SARS-CoV-2) in Aerosols and on Various Surfaces

<https://www.nejm.org/doi/full/10.1056/NEJMc2004973>


Scientists at Princeton University, the University of California-Los Angeles and the National Institutes of Health (NIH) posted online on April 16th 2020 indicating that the COVID-19 virus could remain viable in the air up to 3 hours post aerosolization, while remaining alive on plastic and other surfaces for up to three days.

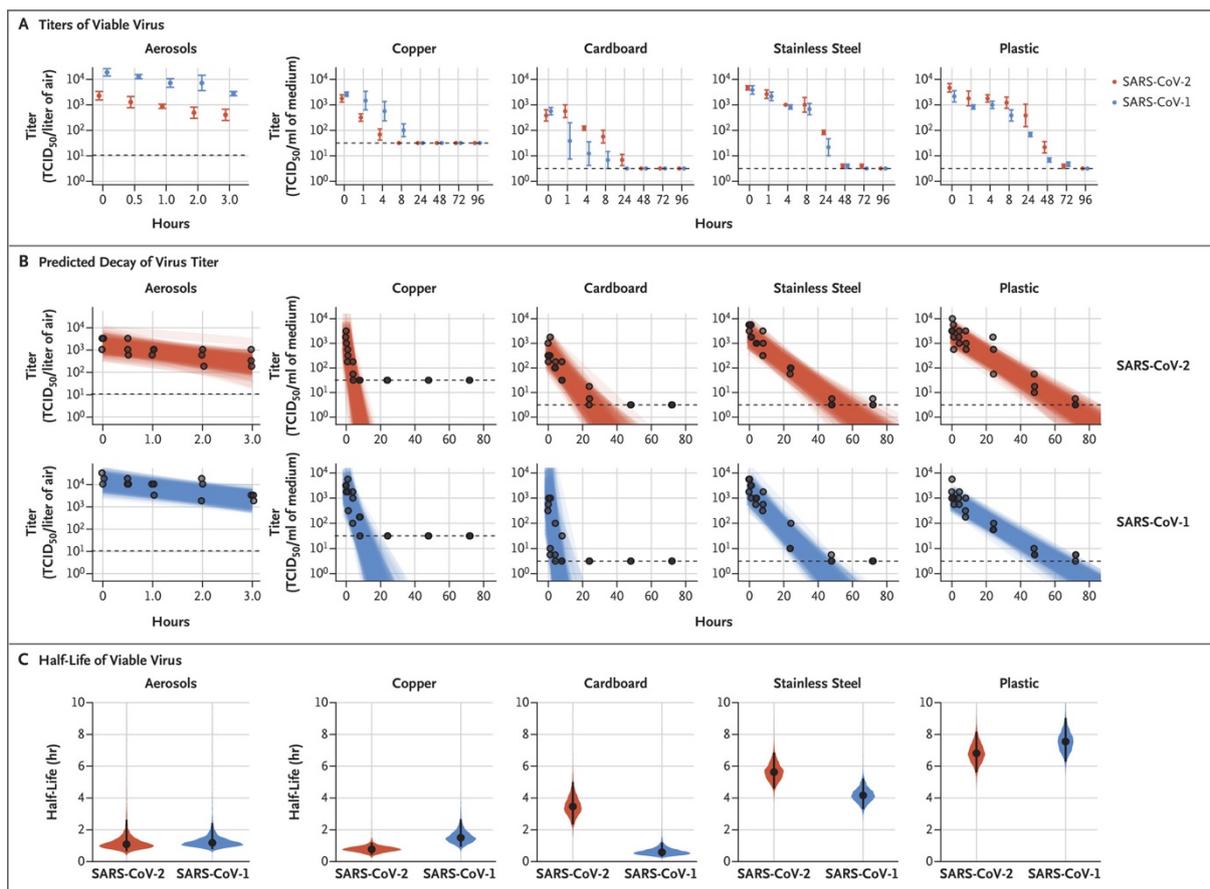

Viability of SARS-CoV-1 and HCoV-19 (SARS-CoV-2) in Aerosols and on Various Surfaces

<https://www.medrxiv.org/content/10.1101/2020.03.09.20033217v1.full.pdf>

"Our results indicate that aerosol and fomite transmission of HCoV-19 is plausible, as the virus can remain viable in aerosols for multiple hours and on surfaces up to days," reads the study's abstract.

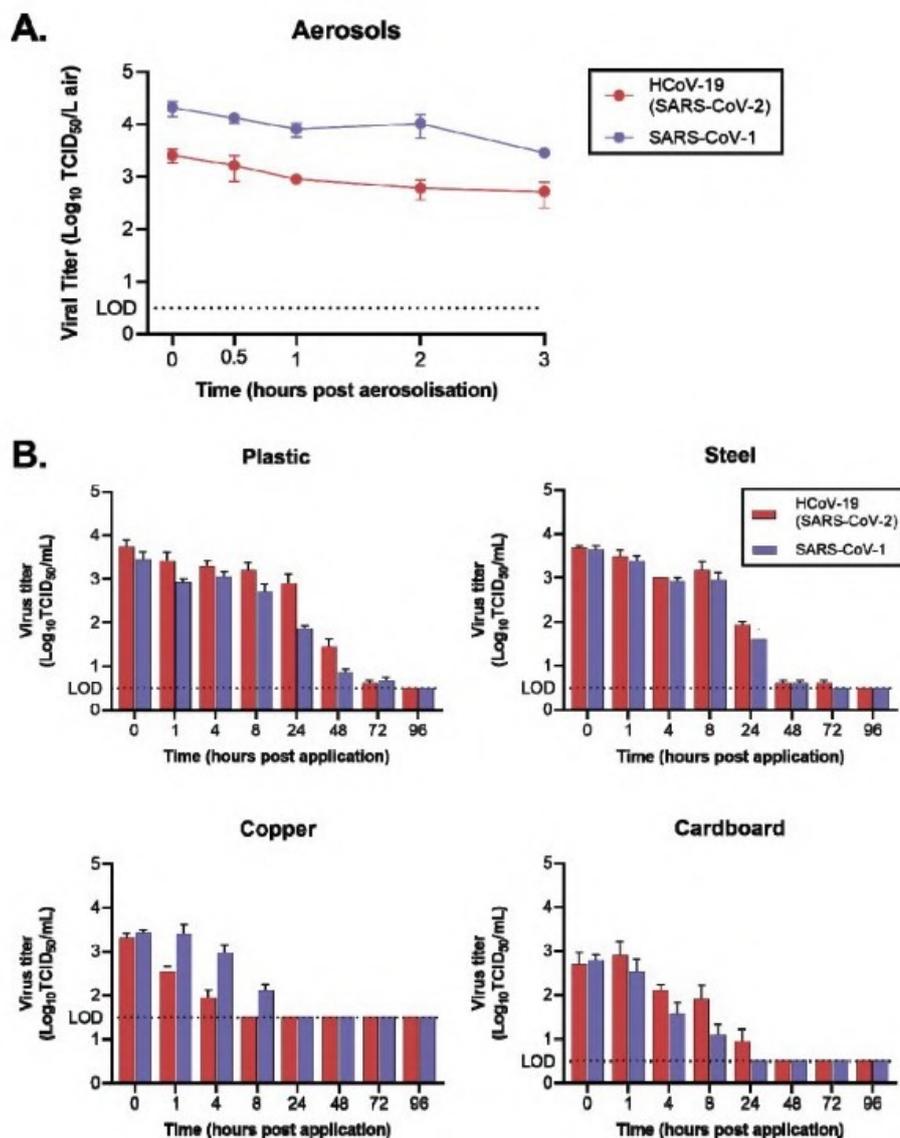


Detection and Quantification of Airborne Norovirus During Outbreaks in Healthcare Facilities

<https://academic.oup.com/cid/article/61/3/299/491373>

A study by the Université Laval in Québec (Clinical Infectious Diseases (2015; doi: 10.1093/cid/civ321), shows that the viruses are actually detectable in the air. The research group has examined the air at different locations in eight health care facilities during norovirus outbreaks: The samples from the patient 's room (one metre away from the patient) were 54 percent positive.

"Norovirus genomes were detected in 6 of 8 healthcare centers. The concentrations ranged from 1.35×10^1 to 2.35×10^3 genomes/m³ in 47% of air samples. MNV-1 preserved its infectivity and integrity during in vitro aerosol studies." reads the study 's abstract.

"Norovirus genomes are frequently detected in the air of healthcare facilities during outbreaks, even out- side patients' rooms. In addition, in vitro models suggest that this virus may withstand aerosolization."

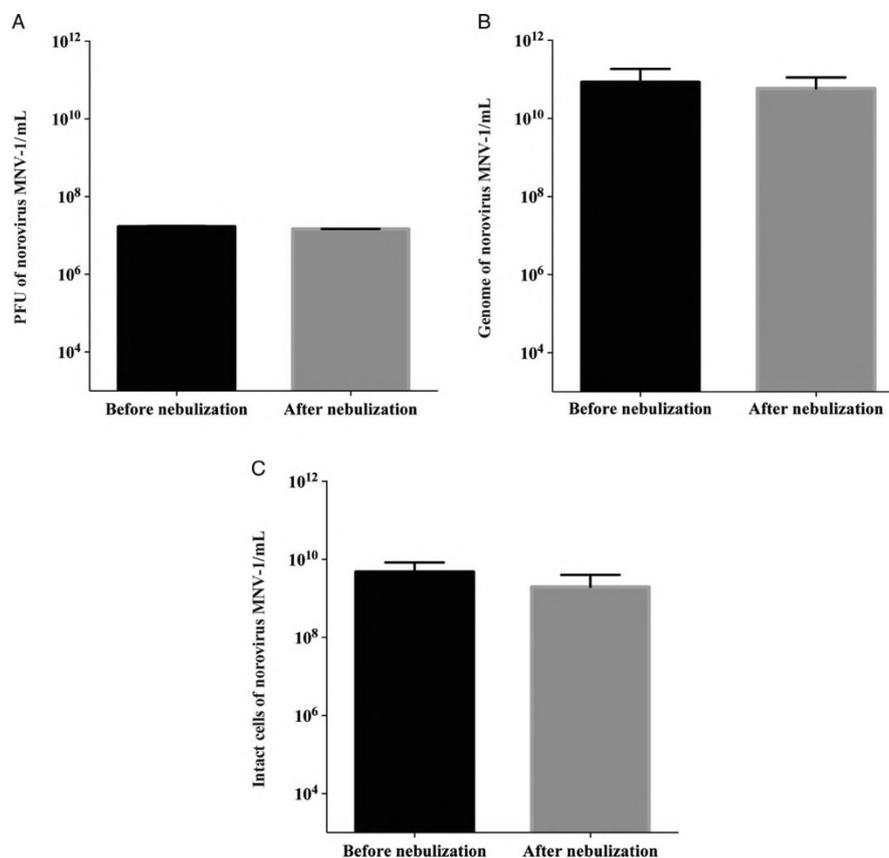

Photocatalytic Titanium Pro UV LED Filter System

www.airodoctor.com

The AiroDoctor air purifier with photocatalytic functionality completely breaks down harmful substances, gases, viruses and pathogenic bacteria instead of the simple collection of contaminants, used in conventional air cleaners. Furthermore, only the substances that touch the surface of the photocatalytic titanium dioxide particles are decomposed. This works extremely efficient and powerful decomposition is possible completely free of ozone and other chemical substances that could be harmful for the human body. Due to the finepored structure of the photocatalytic system, there is an excellent filtration level of particles up to PM2.5 classifications with a diameter of less than 0.1µm

The AiroDoctor with UV LED photocatalytic system offers a durable and reliable air purification with high efficiency and a real elimination of harmful substances compared to conventional air purifiers that only run on a filter basis.

Test Reports:

1. The Kitasato Institute of Medical Research - Japan

99,9% Elimination of Virus & Bacteria

E.coli, MRSA, Influenza A

2. Korean Institute of Civil Engineering and Building Technology – South Korea

99,9% Elimination of Human Corona Virus (HCoV-19 / SARS-CoV-2)

99,9% Elimination of Virus & Bacteria (ISO18061)

E.coli, Salmonella, Rota-Virus, Noro Virus (Murine), Bacteriophage MS-2, Influenza A

Certifications:

1. KC Electrical Certification

2. KC Safety Certification

3. Korea Electronics & Technology Institute

Ozone / Formaldehyde / Atlin / Benzene / Ammonia

4. CE Declaration of Conformity

Test Report: The Kitasato Institute of Medical Research

www.kitasato-u.ac.jp



The Kitasato Institute, Japan's first private medical research facility, was established in 1914. Together with the scientific discovery of life phenomena, the Institute takes as its mission the cultivation of pre eminent researchers, educators, and other professionals in the Life Sciences and related fields and continues to play an active role in education, research, and medicine. Underlying all this is the indomitable spirit of the Institute's founder, Shibasaburo Kitasato, who devoted his life to preventive medicine and was a groundbreaker in the study of Life Sciences, never wavering in his efforts to apply medicine in a practical way to benefit society.

The Kitasato Institute, founded by Shibasaburo Kitasato who also started the National Institute of Infectious Diseases, is a in a joint venture with the Institute of Research for Biologicals and operates the University School of Medicine.

99,9% Elimination of *E.coli*

Table 1. Bacteria elimination effectiveness of equipment for the elimination of virus/bacteria in suspension when *E. coli* used as indicator

| Measurement No. | Concentration of <i>E. coli</i> injected ($\times 10^9$ CFU/ml) | Ultraviolet light source: OFF | | | Ultraviolet light source: ON | | |
|-----------------|---|---|---|--|---|---|--|
| | | Concentration of <i>E. coli</i> collected upstream ($\times 10^5$ CFU/ml) | Concentration of <i>E. coli</i> collected downstream ($\times 10^5$ CFU/ml) | Elimination rate of <i>E. coli</i> (%) | Concentration of <i>E. coli</i> collected upstream ($\times 10^5$ CFU/ml) | Concentration of <i>E. coli</i> collected downstream ($\times 10^5$ CFU/ml) | Elimination rate of <i>E. coli</i> (%) |
| 1 | 1.905 | 110 \pm 1.6 | 80 \pm 0.5 | 27.27 | 115 \pm 1.5 | <0.0001* | >99.999** |
| 2 | 1.905 | 122 \pm 2.0 | 72 \pm 1.0 | 40.98 | 120 \pm 2.0 | <0.0001* | >99.999** |
| 3 | 1.905 | 126 \pm 1.5 | 84 \pm 1.0 | 33.33 | 126 \pm 1.4 | <0.0001* | >99.999** |

*Shown below measurable limit (10 CFU/ml) because *E. coli* was detected.

** Calculated based on the concentration of *E. coli* collected downstream and measurable limit (10 CFU/ml)

THE KITASATO INSTITUTE
Medical Environment Research Center

Report from: The Kitasato Institute of Medical Research

www.kitasato-u.ac.jp

99,9% Elimination of MRSA

Table 2. Bacteria elimination effectiveness of equipment for the elimination of virus/bacteria in suspension when MRSA used as indicator

| Measurement No. | Concentration of MRSA injected ($\times 10^9$ CFU/ml) | Ultraviolet light source: OFF | | | Ultraviolet light source: ON | | |
|-----------------|--|--|--|------------------------------|--|--|------------------------------|
| | | Concentration of MRSA collected upstream ($\times 10^5$ CFU/ml) | Concentration of MRSA collected downstream ($\times 10^5$ CFU/ml) | Elimination rate of MRSA (%) | Concentration of MRSA collected upstream ($\times 10^5$ CFU/ml) | Concentration of MRSA collected downstream ($\times 10^5$ CFU/ml) | Elimination rate of MRSA (%) |
| 1 | 1.605 | 120 \pm 1.5 | 86 \pm 0.5 | 27.27 | 115 \pm 1.5 | <0.0001* | >99.999** |
| 2 | 1.605 | 1232 \pm 2.2 | 70 \pm 2.0 | 40.98 | 120 \pm 2.0 | <0.0001* | >99.999** |
| 3 | 1.605 | 126 \pm 1.8 | 80 \pm 1.0 | 33.33 | 126 \pm 1.4 | <0.0001* | >99.999** |

* Shown below measurable limit (10 CFU/ml) because MRSA was detected.

** Calculated based on the concentration of MRSA collected downstream and measurable limit (10 CFU/ml)

THE KITASATO INSTITUTE,
Medical Environment Research Center

99,9% Elimination of Influenza A

Table 3. Virus elimination effectiveness of equipment for the elimination of virus/bacteria in suspension when Influenza virus A used as indicator

| Measurement No. | Concentration of Influenza virus A injected (TCID ₅₀ /ml) | Ultraviolet light source: OFF | | | Ultra Violet light source: ON | | |
|-----------------|--|--|--|---|--|--|---|
| | | Concentration of Influenza virus A collected upstream (TCID ₅₀ /ml) | Concentration of Influenza virus A collected downstream (TCID ₅₀ /ml) | Elimination rate of Influenza virus A (%) | Concentration of Influenza virus A collected upstream (TCID ₅₀ /ml) | Concentration of Influenza virus A collected downstream (TCID ₅₀ /ml) | Elimination rate of Influenza virus A (%) |
| 1 | 1.0 ^{7.5} | 10 ⁵² | 10 ⁴⁸ | 60.19 | 10 ⁴⁴ | 10 ^{<0.5*} | >99.987** |
| 2 | 1.0 ^{7.5} | 10 ⁴⁸ | 10 ⁴² | 74.88 | 10 ⁵² | 10 ^{<0.5*} | >99.998** |
| 3 | 1.0 ^{7.5} | 10 ⁴⁸ | 10 ⁴³ | 49.88 | 10 ⁴⁸ | 10 ^{<0.5*} | >99.995** |

* Shown below measurable limit (10^{<0.5} TCID₅₀/ml) because Influenza virus A was detected.

** Calculated based on the concentration of Influenza virus A collected downstream and measurable limit (10^{<0.5} TCID₅₀/ml)

THE KITASATO INSTITUTE,
Medical Environment Research Center

Test Report: Korean Institute of Civil Engineering and Building Technology (KICT)

www.kict.re.kr



Korea Institute of Civil Engineering and Building Technology (KICT) is a Science & Technology government research institute that opened in 1983. KICT has continuously tried to solve national and social issues to create convenient and safe high-quality land in Korea. The KICT is a member research institute of the National Research Council of Science & Technology which operates together with the Ministry of Science and ICT.

| Anti-viral Performance Assessment | | | | | | | | | | | | | | | | | |
|-----------------------------------|--------|---------|-------------------------|--|-------------------|------------------|-------------------|------------------|-------------------|------------------|------------------|------------------|------------------|-----------------------------|------------------------|------------------------|-------|
| 실험방법 | 광촉매 소재 | | 균 · 바이러스 | | UV 조사 및 측정 시간 | | | | | | | | | 분석방법 | 바이러스 제거율 | | |
| | 종류 | 농도 | 종류 | 농도 | 0.25 ^m | 0.5 ^m | 0.75 ^m | 1.0 ^h | 1.25 ^h | 1.5 ^h | 2.0 ^h | 3.0 ^h | 4.0 ^h | | | | |
| Coating | P-25 | - | Bacteriophage Q β | 1 × 10 ⁷ pfu/ml | | ⊙ | | ○ | | | ○ | ○ | ○ | Plaque Assay | 99.99% | | |
| | NP400 | | Bacteriophage MS-2 | 2 × 10 ⁴ pfu/ml | | ○ | | ○ | | ⊙ | | ○ | | | Pour Plate Method | 99.8% | |
| | | | <i>E. coli</i> | | | ○ | | ○ | | ⊙ | | ○ | | | Spreading Plate Method | 99% ↑ | |
| | | | <i>Salmonella</i> | | | ○ | | ○ | | ⊙ | | ○ | | | | Spreading Plate Method | 99% ↑ |
| | | | Norovirus(Murine) | | | ○ | | ○ | | ⊙ | | ○ | | | | Plaque Assay | 99% ↑ |
| | | | Rotavirus | | | ○ | | ○ | | ⊙ | | ○ | | | | Plaque Assay | 99% ↑ |
| | P-25 | | Influenza | 6.7 × 10 ⁶ TCID ₅₀ /ml | | | | | | | | | | ⊙ | TCID ₅₀ | 99.99% | |
| Suspension | P-25 | 0.0005% | Bacteriophage Q β | 5 × 10 ⁷ pfu/ml | ○ | ○ | | ⊙ | | | | | | Plaque Assay | 99.99% | | |
| | | | <i>E. coli</i> | | ○ | ○ | | ⊙ | | | | | | Spreading Plate Method | 99.99% | | |
| | NP400 | 0.1% | Bacteriophage MS-2 | 2 × 10 ⁴ pfu/ml | ○ | ○ | | ⊙ | ○ | | | | | Pour Plate Method | 99.9% | | |
| | | | <i>E. coli</i> | | ○ | ○ | | ⊙ | ○ | | | | | Spreading Plate Method | 99% ↑ | | |
| | | | <i>Salmonella</i> | | ○ | ○ | | ⊙ | ○ | | | | | Spreading Plate Method | 99% ↑ | | |
| | | | Norovirus(Murine) | | ○ | ○ | | ⊙ | ○ | | | | | Plaque Assay | 99% ↑ | | |
| | | | Rotavirus | | ○ | ○ | | ⊙ | ○ | | | | | Plaque Assay | 99% ↑ | | |
| | P-25 | 0.1% | HCoV | 2 × 10 ⁴ pfu/ml | ○ | ○ | ○ | ⊙ | | | | | | RT-qPCR | 99% ↑ | | |
| | P-25 | 0.05% | HCoV | 2 × 10 ⁴ pfu/ml | | | | | | | | | ⊙ | RT-qPCR, TCID ₅₀ | 99.96% | | |

Fig. 1: Antiviral and antimicrobial performance evaluation of photocatalytic materials

Test Report: Korean Institute of Civil Engineering and Building Technology (KICT)

www.kict.re.kr



99,9% Elimination of Human Corona Virus (HCoV / later renamed to SARS-CoV-2)

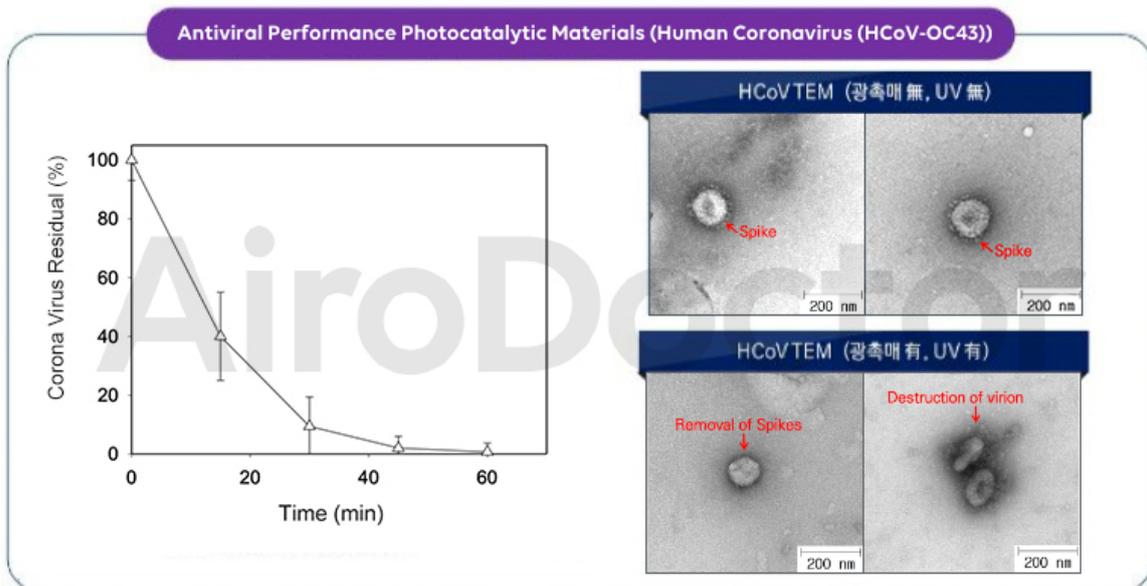


Fig. 2: Antiviral performance evaluation of photocatalytic materials using the Human Corona Virus HCoV-OC43

Test Report: Korean Institute of Civil Engineering and Building Technology (KICT)

www.kict.re.kr



99,9% Elimination of *E.coli*, Salmonella, Rota-Virus, Noro-Virus, Bacteriophage MS-2, Influenza A

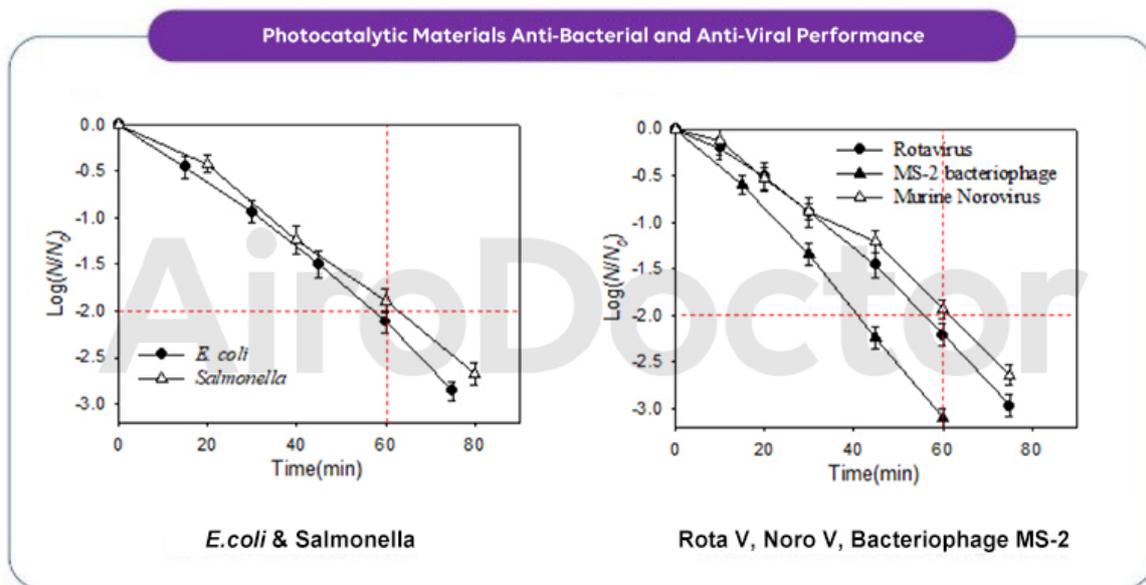


Fig. 3: Antimicrobial and antiviral performance of photocatalytic material

Test Report: Korean Institute of Civil Engineering and Building Technology (KICT)

www.kict.re.kr

Reply to request for consent regarding the use of photocatalytic air purifier marketing

| | Content | Remarks |
|---------------------|--|---------|
| Original technology | "AiroDoctor" is an air purifier equipped with photocatalytic air conditioning filter modules with antibacterial and antiviral performance. | Agree |
| | The technology was transferred and applied by the construction company through research and development. | Agree |
| Marketing leverage | Consent to quoting excerpts and contents of research reports | Agree |
| | Agree to excerpt and quote photocatalytic module test results (including references). | Agree |
| | Agreed to announce that photocatalytic air conditioning filter module technology with antimicrobial antiviral performance is a contract technology of construction kite. | Agree |
| | Agree to use the above by translating the content stipulated above. | Agree |

한국건설기술연구원장



★ Employees : Kim sung Jun Head of Research

Final decision 05/29
Gu Hyeun Bon

Co-operative

Enforce : Infrastructure Safety Research Headquarters -12265 (2020.05.29.) Received ()

Postcode : 10223 283 Goyang Dero Ilsan seo-Gu Goyang-Si Kyounggi-Di / <http://www.kict.re.kr>
Tel : 042)610-8857 /Fax : 031)910-0121 / seongjun@kict.re.kr / Public

Certification: KC Electrical Certification

National Radio Research Agency

738E-D7EB-CF6E-8733

| 방송통신기자재등의 적합등록 필증 <i>Registration of Broadcasting and Communication Equipments</i> | |
|---|------------------------------------|
| 상호 또는 성명 <i>Trade Name or Registrant</i> | 태석정공(주) |
| 기자재명칭(제품명칭) <i>Equipment Name</i> | 공기청정기 |
| 기본모델명 <i>Basic Model Number</i> | WAD-M20 |
| 파생모델명 <i>Series Model Number</i> | WAD-M21, WAD-M24, WAD-M23, WAD-M22 |
| 등록번호 <i>Registration No.</i> | R-R-TI7-WAD-M20 |
| 제조사/제조(조립)국가 <i>Manufacturer/Country of Origin</i> | 태석정공(주) / 한국 |
| 등록연월일 <i>Date of Registration</i> | 2020-01-29 |
| 기타 <i>Others</i> | |
| <p>위 기자재는 「전파법」 제58조의2 제3항에 따라 등록되었음을 증명합니다. It is verified that foregoing equipment has been registered under the Clause 3, Article 58-2 of Radio Waves Act.</p> <p style="text-align: right;">2020년(Year) 01월(Month) 29일(Day)</p> <p style="text-align: center;">국립전파연구원장 </p> <p style="text-align: center;"><i>Director General of National Radio Research Agency</i></p> <p style="text-align: center;">* 적합등록 방송통신기자재는 반드시 "적합성평가표시" 를 부착하여 유통하여야 합니다. 위반시 과태료 처분 및 등록이 취소될 수 있습니다.</p> | |

Certification: KC Safety Certification

Korea Testing Certification

전기용품 및 생활용품 안전관리법 시행규칙 [별지 제15호서식] 접수번호 : 20191212-0030



안전확인신고증명서

Confirmation Letter of Declaration

신고번호: XH070499-20001A
 (Application No.)
신고회사명: 태석정공(주)
 (Applicant)
주소: 경기도 김포시 양촌읍 황금1로80번길 172
 (Address)
제품명: 공기청정기
 (Product)
기본모델명: WAD-M20
 (Basic Model)
파생모델명 (Series Model):

정격/안전기준상의 모델구분: 220 V~, 60 Hz, 85 W
 (Rating)
안전기준: KC 60335-1(2016-10) KC 60335-2-65(2015-09)
 (Standard)

본 확인신고는 **제조국명: 한국**
제조업자명: 태석정공(주)
제조공장의 주소: 경기도 김포시 양촌읍 황금1로80번길 172
의 제품에만 해당함

「전기용품 및 생활용품 안전관리법 시행규칙」 제28조제1항, 같은 조 제3항, 제29조제2항 또는 제34조제2항에 따라 안전확인신고 증명서를 발급합니다.
 We issue this Confirmation Letter of Declaration of the Safety Confirmation for the above appliances in accordance with Article 28(1), 28(3), 29(2) or 34(2) of the Electrical Appliances and Consumer Products Safety Control Act.

2020 년 02 월 20 일
(Year) (Month) (Day)



한국기계전기전자시험연구원

Korea Testing Certification




※ 이 신고증명서는 「전기용품 및 생활용품 안전관리법」에 따른 제품의 안전성 확인에 한정된 것이며, 그 밖의 다른 법률이 적용되는 제품의 경우에는 해당 법률에 따라 추가로 인증·허가 등을 받아야 합니다.

| | |
|------|---|
| 첨부서류 | 1. 전기용품의 안전관리부품 및 재질목록 (List of Critical Components)(전기용품에 한정한다) 2. 기본모델 · 파생모델의 내용 (Descriptions of the basic and series model) 3. 안전확인신고 내용의 변경 현황 (Revisions Status) |
|------|---|

Certification: Korea Electronics & Technology Institute

Ozone / Formaldehyde / Atlin / Benzene / Ammonia

| TEST REPORT 시험 성적서 | |
|---|---|
| Korea Electronics Technology Institute Gwangju Regional Branch #226, Cheondangjeog1-ro, Buk-gu, Gwangju, Korea Tel : +82-62-975-7015 Fax : +82-62-975-7019 | Report No. : 2020-01-A031 G page (1) / (4) |
|  KETI Korea Electronics Technology Institute 전자부품연구원 | |
| 1. Client <input type="radio"/> Company : TAESEOK PRECISION & INDUSTRY CO., LTD. <input type="radio"/> Name : Seo Sang Hyun <input type="radio"/> Address : #172, Hwanggam 1-ro 83beon-gil, Yangcheon-eup, Gimpo-si, Gyeonggi-do, Korea (10048) <input type="radio"/> Request date : Jan. 30th. 2020 | |
| 2. Purpose of use : Report for client | |
| 3. Name of specimen : Airodoctor Aircleaner (WAD-M20) | |
| 4. Date of test : Feb. 10th ~ 11th. 2020 | |
| 5. Test environment : <input type="radio"/> Temperature : (23 ± 5) °C Humidity : (50 ± 25) % R.H. <input type="radio"/> Location : <input checked="" type="checkbox"/> Fixed Lab. <input type="checkbox"/> On site(address :) | |
| 6. Test method : SPS-KACA 002-0132:2018 (Air cleaner) | |
| 7. Test results : Refer to the test result | |
| The results shown in this test report refer only to the sample(s) tested unless otherwise stated. | |
| Affirmat ion | Tested by Name: Hee-Sung Koo  |
| Technical Manager Name: Choul-Jun Choi  | |
| This report is for improving quality and reliability of the product. It is not aloud to use other reason, such as rendering legal, accounting, and engineering. KETI disclaims any responsibility or liability for the use of this information except of original purpose. | |
| Apr. 24th. 2020 Korea Electronics Technology Institute Gwangju Regional Branch (Sign)  | |
| Please contact us by cjcjoi@keti.re.kr to confirm authenticity of the report | |

Certification: CE - Declaration of Conformity

Europe Market Importer: ScreenSource GmbH



Declaration of Conformity

according to the EC Directive 2004/108/EC (electromagnetic compatibility) of December 15h, 2004.

We hereby declare that the machine specified below in its design, construction and in the version marketed by us is conform with the basic safety and health requirements of the EC Directive 2004/108/EC. When changes to the unit are not coordinated with us, this declaration loses its validity.

Manufacturer: Taeseok Precision Co. Ltd.
#172, Hwanggeum 1-ro 80beon-gil, Yangchon-eup, Gimpo-si, Gyeonggi-do, 10048, KOREA

Importer: ScreenSource GmbH
Köthener Str. 8
06779 Raguhn-Jessnitz
Germany

Authorized person: Carsten Hermann

Description of items:

- Product type: AiroDoctor UV-LED Photocatalytic Air Sterilizer
- Series: WAD-M20

Moreover, the product(s) meet the compliance with another, also applicable EC-Directives:

- *Low Voltage EC Directive (2006/95/EC) of December 12th, 2006*
- *EN 60950-1:2006 - Information Technology Equipment - Safety*
- *EN 61000-6-1:2007 - Electromagnetic Compatibility (EMC)*
- *EN 61000-6-3:2007 - Electromagnetic Compatibility (EMC)*

Date of Declaration: 01/01/2020

Name of Signatory: Carsten Hermann

Title of Signatory: CEO

Signature: